

15.04.03



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

REC'D 01 MAY 2003

WIPO

PCT

BEST AVAILABLE COPY

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02291027.7

COMPLIANCE WITH RULE 17.1(a) OR (b)

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

DEN HAAG, DEN
THE HAGUE,
LA HAYE, LE

19/03/03



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

**Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation**

Anmeldung Nr.:
Application no.:
Demande n°: **02291027.7**

Anmeldetag:
Date of filing:
Date de dépôt: **23/04/02**

Anmelder:
Applicant(s):
Demandeur(s):
Koninklijke Philips Electronics N.V.
5621 BA Eindhoven
NETHERLANDS

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention:
Interference free LMS-based adaptive asynchronous receiver

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:
State:
Pays:

Tag:
Date:
Date:

Aktenzeichen:
File no.
Numéro de dépôt:

Internationale Patentklassifikation:
International Patent classification:
Classification internationale des brevets:

/

Am Anmeldetag benannte Vertragsstaaten:
Contracting states designated at date of filing:
Etats contractants désignés lors du dépôt:

AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR

Bemerkungen:
Remarks:
Remarques:

INTERFERENCE FREE LMS-BASED ADAPTIVE ASYNCHRONOUS RECEIVER

FIELD OF THE INVENTION

The invention generally relates to digital transmission and recording systems. In particular, it relates to a receiver for delivering a data sequence a_k at a data rate $1/T$ from a received sequence r_n sampled at a clock rate $1/T_s$, asynchronous to the data rate $1/T$.

The invention also relates to a digital system comprising a transmitter for transmitting a digital sequence via a channel and a receiver for extracting said digital sequence from said channel, wherein said receiver is a receiver as described above.

The invention further relates to an equalizer adaptation method for said receiver. It finally relates to a computer program product for such a receiver and to a signal for carrying said computer program.

The invention applies to a wide variety of asynchronous receivers for use in digital transmission and recording systems. It is particularly advantageous in high density / capacity optical disc systems such as the Blu-ray Disc system (BD).

BACKGROUND ART

The American patent n° 5 999 355 describes an asynchronous receiver such as the one mentioned in the opening paragraph. In accordance with the cited patent, the equalizer is a tapped delay line (Finite Impulse Response filter) with a tap spacing of T_s seconds. Control of the equalizer is based on the classical LMS (Least Mean Square) algorithm; that is to say, correlating the tap sequences with a suitable error sequence produces updates of the equalizer tap values. Classical LMS techniques normally apply to synchronous receivers wherein error and tap sequences have the same sampling rate and are phase synchronous. The asynchronous receiver described in the cited patent thus comprises at least two provisions in order that error and tap sequences have the same sampling rate and are phase synchronous. The latter condition implies that any latency in the error sequence should be matched by delaying the tap sequences accordingly. The aforementioned two provisions include an inverse sampling rate conversion (ISRC) for converting the synchronous error sequence at the data rate $1/T$ into an equivalent error sequence of sampling rate $1/T_s$. The receiver, having an asynchronously placed LMS-based adaptive equalizer, has two control loops: a timing recovery loop or PLL (Phase locked loop) and an equalizer's adaptation loop. Unless

precautions are taken, both loops can interfere with each other, which can lead to instability.

SUMMARY OF THE INVENTION

It is an object of the invention to provide an asynchronous receiver using an alternative adaptation topology that circumvents the disadvantage mentioned above.

In accordance with the invention, a receiver as mentioned in the opening paragraph is provided, comprising:

- an adaptive equalizer (EQ) for delivering an equalized sequence (y_n) from said received sequence (r_n), said equalizer operating at the clock rate $1/T_s$ and being controlled via an equalizer's adaptation loop,

- a sampling rate converter (SRC1) for converting said equalized sequence (y_n) to an equivalent input sequence (x_k) to be provided to an error generator (21) at the data rate $1/T$ via a timing recovery loop,

- an error generator (21) for delivering, from said input sequence (x_k), the data sequence (a_k) and an error sequence (e_k) to be used in both loops,
- orthogonal control functionality means (40) for deriving a condition for the adaptive equalizer (EQ) to obey in order to decrease interference between said equalizer's adaptation loop and said timing recovery loop.

In this way, the interference is avoided between both loops by deriving a condition the equalizer should obey in order to delete the interference between the two loops, which implies "orthogonal control functionality" and by combining the condition with the equalizer's adaptation loop. The equalizer shall adapt so that the condition is always true. With the orthogonal control functionality means, the equalizer is adapted by the equalizer's adaptation controlling algorithm (based on Least Mean Square algorithm or LMS for instance) such that the orthogonal control functionality condition is obeyed, resulting in an interference free system.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention and additional features, which may be optionally used to implement the invention, are apparent from and will be elucidated with reference to the drawings described hereinafter and wherein:

- Fig. 1 is a functional block diagram illustrating a generic asynchronous receiver topology for use in digital transmission and recording systems,
- Fig. 2 is a functional block diagram illustrating an example of an asynchronous LMS-based receiver topology.

- Fig.3 is a functional block diagram illustrating an other example of a receiver in accordance with an asynchronous LMS-based topology,
- Fig.4 is a functional block diagram illustrating a receiver topology in accordance with a first embodiment of the invention,
- 5 - Fig. 5a and Fig.5b are graphs illustrating simulation results relating to the receivers of Fig. 3 and 4, respectively,
- Fig.6 is a graph illustrating linear interpolation in accordance with a second embodiment of the invention,
- Fig.7 is a functional block diagram illustrating a receiver topology in accordance with a second embodiment of the invention,
- 10 - Fig.8a and Fig. 8b are graphs illustrating simulation results relating to the receiver of Fig. 7,
- Fig.9 is a schematic block diagram illustrating a digital system in accordance with the invention.

DETAILED DESCRIPTION OF THE DRAWINGS

The following remarks relate to reference signs. Same block labels in all figures usually indicate same functional entities. In the sequel, we will also adopt the convention that vectors are denoted by underlined symbols, and that the symbols k and n refer to sequences of sampling rate $1/T$ and $1/T_s$, respectively. For example, according to this convention the notation a_k refers to a scalar sequence of sampling rate $1/T$, and the notation \underline{S}_n refers to a vector sequence of sampling rate $1/T_s$. The length of a vector will be denoted by the symbol N and a subscript indicating the symbol used for the vector. Accordingly, for example, the length of the vector \underline{S}_n is denoted N_s .

Fig. 1 illustrates a generic topology of an asynchronous base-band receiver for digital transmission and recording systems. The receiver generates a data sequence a_k at a data rate $1/T$ from a received signal $r(t)$. The received signal $r(t)$ is applied to an analog low pass filter LPF whose main function is to suppress out-of-band noise. An analog-to-digital converter ADC, which operates at crystal-controlled free-running sampling rate $1/T_s$, asynchronous to the data rate $1/T$, which is high enough to prevent aliasing, digitizes the LPF output. The ADC output is applied to an equalizer EQ which serves to condition inter-symbol interference and noise. The equalizer operates at the sampling rate $1/T_s$, i.e. asynchronously to the data rate $1/T$. A sampling-rate converter SRC produces an equivalent synchronous output which serves as the input of a bit detector DET for delivering the data sequence a_k . The SRC forms part of a

timing-recovery loop (TRL), which is not depicted explicitly in Fig. 1. Asynchronous and synchronous clock domains are indicated in Fig.1 with the symbols $1/T_s$ and $1/T$, respectively.

To cope with variations of the system parameters, the equalizer EQ often needs to be adaptive. To this end, error information is extracted from the bit detector DET by an error formation circuit EFC and is used to control (update) the equalizer taps via a control module CTL. This forms an equalizer's adaptation loop (EAL). Error formation occurs in the synchronous ($1/T$) clock domain, while control necessarily occurs in the asynchronous ($1/T_s$) domain. In between, an inverse sampling-rate converter ISRC is required. In practice, the equalizer is often a tapped delay line (Finite Impulse Response filter) with a tap spacing of T_s seconds.

Existing asynchronous adaptation techniques are based on LMS (Least Mean Square) algorithms. With LMS, cross-correlating the tap sequences with a suitable error sequence derives updated information for the equalizer taps. For this to work, the tap and error signals need to be synchronous both in sampling rate and in phase. The first condition is met via the ISRC. The second one requires that the total latency of SRC, bit-detector, error formation circuit, and ISRC is matched by delaying the tap signals accordingly, prior to cross-correlation. Both ISRC and delay matching add to the complexity of the solution. Delay matching, moreover, may not be accurate because of the time-varying nature of the latency of SRC and ISRC. As a result, adaptation performance may degrade.

Fig.2 shows an example of a receiver comprising an adaptation topology that overcomes the disadvantages mentioned before. Only a part of the data receiver is shown in Fig. 2, namely the part relevant to digital equalizer adaptation. In particular, the timing-recovery subsystem of the receiver, which controls the sampling-rate converter SRC and the temporal interpolation means TI, is not shown. The receiver comprises an adaptive equalizer EQ, a pair of sampling-rate converters SRC1 and SRC2, and a detector DET to produce a data sequence a_k from a received input sequence r_n . The detector DET is part of an error generator 21 which generates an error sequence e_k to be used in the equalizer's control loop from the bit decisions generated by the bit detector. Adaptation of the equalizer is based on LMS techniques as described, for example, in the book by J.W.M. Bergmans : "Digital Baseband Transmission and Recording", published by Kluwer Academic Publishers, Boston, 1996, denoted [ref.]. Central to these techniques is that tap update information is produced by correlating the tap signals (received sequence r_n) with the error signals. Error and tap signals

should have the same sampling rate, and should moreover be phase synchronous; any latency in the error signal should be matched by delaying the tap signals accordingly.

In Fig.2, r_n denotes the sequence obtained by periodic sampling of e.g. an analog replay signal from a recording channel. Sampling is performed at a free-running clock rate $1/T_s$ which is generally not equal to the data rate $1/T$. The sequence r_n is passed through an equalizer EQ having T_s -spaced taps w_n for producing an equalized sequence y_n at its output. Preferably, the equalizer EQ is an FIR (Finite Impulse Response) transversal filter, but it can be any equalizer that contains a linear combiner. The purpose of the equalizer is to shape the response of the (e.g. recording) channel to a prescribed target response and condition the noise spectrum. The equalizer EQ is followed by a sample rate converter SRC which transforms the T_s -spaced equalized sequence y_n into an equivalent T -spaced sequence x_k to be provided at the input of an error generator 21 comprising a bit detector DET. The T -spaced input sequence x_k is ideally synchronous to the data rate $1/T$ of the channel data sequence a_k . Actually, the bit detector DET produces estimates \hat{a}_k of the channel bits a_k . Assuming that the bit detector produces correct decisions, the data sequence a_k and its estimate \hat{a}_k are identical. Therefore, the outputs of the bit detector are denoted a_k in all figures. Occasional bit errors do not significantly affect the performance of the system. Alternatively, at the beginning of transmission, a predetermined data sequence (often referred to as preamble) may precede the actual data in order for initial adaptation to be based on a replica of this predetermined data sequence, which can be synthesized locally in the data receiver without any bit errors. It is common practice to perform the initial stage of adaptation in this so-called 'data-aided' mode of operation, and to switch to the 'decision-directed' mode of operation as depicted in Figure 2 once adaptation loops have converged. While not depicted explicitly in Figure 2, it is to be understood that the present description also pertains to this 'data-aided' mode of operation.

The remaining part of Fig.2 illustrates the mechanism of the control loop for adaptively updating the equalizer tap coefficient vector sequence \underline{w}_n using LMS techniques. All digital operations involved in the control loop can be realized e.g. by a microprocessor carrying out a suitable computer program. The thick arrows between blocks indicate vector signals transfers while thin arrows indicate scalar signals.

Therefore, the control loop (equalizer's adaptation) comprises:

- a second sampling rate converter SRC2 for converting a delayed version of the received sequence r_n into an intermediate control sequence I_k at the

data rate $1/T$, this second SRC, denoted SRC2, is preferably the same as the first SRC1,

- control information production means 22 for deriving a synchronous control vector sequence \underline{Z}_k at the data rate $1/T$, from the error sequence e_k and the intermediate control sequence i_k , and
- temporal interpolation means TI for deriving the control vector sequence \underline{S}_n from said synchronous control vector sequence \underline{Z}_k .

In Fig. 2, the control vector sequence \underline{S}_n directly controls the equalizer, i.e. the equalizer tap vector sequence \underline{W}_n simply coincides with \underline{S}_n . The synchronous control vector sequence \underline{Z}_k produced by the control information production means is formed by a bank of N_z Integrators 22, whose input is derived from a cross product $e_k \cdot \underline{I}_k$,

where \underline{I}_k is an intermediate vector sequence consisting of N_i intermediate sequences. All the vector lengths are equal. Therefore, $N_z = N_i = 2M+1$. The number $2M+1$ being the number of taps w_n in the equalizer EQ. This intermediate vector sequence \underline{I}_k is derived from the received sequence r_n . A predefined delay τ is applied to the received sequence r_n . The delayed version of the received sequence r_n is provided to a sampling rate converter SRC2 to form an intermediate sequence i_k , prior to a shift register SR performing a serial to parallel conversion to form the intermediate vector sequence \underline{I}_k out of the intermediate sequence i_k .

The input of the equalizer is thus converted to the data rate domain after it has been delayed with a predefined delay. The predefined delay is not time varying and well known. It is equal to the amount of delay from the input of the equalizer to the output. Once both signals, i.e. the signals at the output of each sampling rate converters are in the data rate domain, the equalizer coefficient updates can be easily computed. The adaptation scheme is detailed hereafter.

The variables at the output of the Integrators 22, denoted z_k^j , obey the following equation:

$$z_{k+1}^j = z_k^j + \mu \Delta_k^j, \quad j: -M, \dots, M \quad (1)$$

where :

- z_k^j is the output of the j -th Integrator at instant k ,
- μ is a small scaling factor (often referred to as step size) which determines closed-loop time constants,
- Δ_k^j is a tap-error estimate at iteration k , and
- $2M+1$ is the number of taps of the equalizer.

According to the LMS scheme, the estimate Δ_k^j is given by :

$$\Delta_k^j = e_k \cdot i_{k-j}, \quad j: -M, \dots, M \quad (2)$$

where :

- e_k is the error between the SRC output and a (delayed version of) the desired detector input $d_k = (a * g)_k$, with :
- 5 - g_k is the target response (of a filter G) for the equalizer adaptation
- i_{k-j} is a delayed version of the received sequence r_n converted into the data rate $1/T$.

For the sake of completeness It is mentioned that equation (2) and Figure 2 describe only one of the various possible manners to derive tap-error estimates Δ_k^j from the error sequence e_k and the input sequence r_n . For example, both of the two sequences e_k and r_n can be strongly quantized so as to simplify implementation, and the multiplication in (2) can be replaced by a selective-update mechanism.

Fig.2 shows that the synchronous control vector sequence \underline{z}_k at the output of the integrators is updated every T seconds (synchronous domain), while the equalizer coefficient vector \underline{w}_n needs to be updated every T_s seconds, since the equalizer operates in the asynchronous domain. The necessary time-base conversion is performed through the temporal Interpolation means TI for deriving an asynchronous control vector sequence \underline{s}_n at the sampling rate $1/T_s$ from the synchronous control vector sequence \underline{z}_k at the output of the bank of integrators. Since tap values change only slowly with respect to both sampling rates, the temporal interpolation can be done in the simplest conceivable manner, e.g. via a bank of latches performing zeroth-order interpolation. When T_s deviates too much from T , an additional issue is raised, which requires an additional functionality, called spatial interpolation. The additional functionality is described in reference with Fig.3.

The equalizer has a tap spacing of T_s seconds, i.e. it acts to delay the input sequence in steps of T_s seconds to obtain the successive tap signals, which are then combined linearly with weights w_n^j , $j : -M, \dots, M$, that are defined by the coefficient vector sequence \underline{w}_n . The control vector sequence \underline{s}_n at the output of the bank of integrators, however, pertains to a T -spaced equalizer, i.e. successive components s_n^j , $j : -M, \dots, M$, of \underline{s}_n are meant in principle as weighting factors for an equalizer with tap spacing T . The discrepancy between this nominal tap spacing of T seconds and the actual tap spacing of T_s seconds results in a degradation of adaptation performance, both in terms of the steady-state solution at which the equalizer settles and in terms of a degradation of loop efficiency. As a result, the topology of Fig. 2 is mainly suitable for near-synchronous applications, e.g. applications in which $1/T_s$ and $1/T$ are close to

each other, and preferably differ less than some 20. This condition is met in many practical systems, e.g. In most channel ICs (Integrated Circuits) for hard disk drivers (optical storage).

In order to be able to use the invention within a larger range of applications, an improvement of the scheme described in Fig.2 is proposed in fig.3. According to this improvement, the control loop further comprises spatial conversion means for deriving the equalizer coefficient vector sequence \underline{W}_n from the asynchronous control vector sequence \underline{S}_n at the output of the temporal interpolation means. As a result, an initially T-spaced sequence generated within the control loop is converted into an equivalent Ts-spaced sequence for controlling the equalizer coefficient vector \underline{W}_n . In Fig.3, these spatial conversion means are indicated with the symbol SI. Since the update variables

s_n^j describe the coefficients of a T-spaced equalizer, it is indeed necessary to convert this T-spaced information into Ts-spaced information. This necessitates interpolation on the coefficients s^j , which is performed by the Spatial Interpolator block SI.

Conceptually, the update variables s^j are T-spaced samples of an underlying time-continuous equalizer filter whose impulse response is denoted $w(t)$, i.e. $s^j = w(jT)$, $j : -M, \dots, M$. Assuming that $w(t)$ were available, we would have to resample it at positions $t_i = i \times Ts$, for $i : -M, \dots, M$, in order to generate the necessary equalizer coefficients $w^i = w(i \times Ts)$. The variable t here does not indicate time but position, and assumes continuous values from a certain interval (the span of the filter). In the same sense, i is a position index that is independent of time, i.e., t_i is fully determined by i and does not change over time. However, since only T-spaced samples of $w(t)$, namely s^j , are available, interpolation of these samples must be used to produce the Ts-spaced variables w^i .

One of the simplest forms of interpolation is linear interpolation, which is attractive from a computational point of view, but other forms of interpolation can be considered such as e.g. nearest-neighbor interpolation, which is even simpler. The resampling positions $t_i = i \times Ts$ can be equivalently written as $t_i = (m_i + c_i)T$, where $0 \leq c_i < 1$, and

$$m_i = \left\lfloor i \frac{T_s}{T} \right\rfloor, \quad c_i = i \frac{T_s}{T} - m_i. \quad (3)$$

As c_i varies between 0 and 1, t_i varies between $m_i T$ and $(m_i + 1)T$, and $w(t)$ varies between $w(m_i T) = s^{m_i}$ and $w((m_i + 1)T) = s^{m_i + 1}$. According to one method of linear interpolation, the value of $w(t)$ at position t_i is then calculated as:

$$w^i = w(t_i) = (1 - c_i) \times s^{m_i} + c_i \times s^{m_i+1} \quad (4)$$

With the aid of (4), the spatial Interpolator SI of Fig.3 converts the T-spaced taps s^i at the output of the latch to T_s -spaced tap settings w^i representing the equalizer taps. In order to perform this conversion it is necessary to know, or estimate, the ratio T_s/T of the channel bit rate to the sampling rate as indicated in equation (3). However, an estimate of this ratio is already available within the sampling rate converter SRC1 of Fig.3. The SRC re-samples the T_s -spaced sequence y_n at instants $t_k = kT$, which can be re-written as $t_k = (m_k + \mu_k)T_s$.

In the presence of phase errors, the difference between successive sampling instants varies from the nominal value of T according to $t_k - t_{k-1} = T + \tau_k T$, where τ_k is a phase error in the reconstructed T -spaced clock. Then we arrive at the following equation:

$$(m_k - m_{k-1}) + (\mu_k - \mu_{k-1}) = \frac{T}{T_s} + \tau_k \frac{T}{T_s} \quad (5)$$

The timing-recovery loop that controls the SRC1 acts to force the average of the phase error to zero. Therefore, the average of the quantity on the left hand side of (5) will settle on the actual value of T/T_s , or the inverse of the ratio that is needed for linear interpolation.

For the adaptive equalizer of fig. 3 solutions are needed in order to realize "orthogonal" control functionality of the timing recovery loop or PLL and the equalizer's adaptation loop. Time-shifts in the impulse response of the FIR filter (Finite Impulse Response filter) of the equalizer (EQ), which occur as offsets in the "groupdelay" are fully compensated by the timing recovery loop. The "groupdelay" indicates the derivative of the phase characteristic of the filter. As a result the error e_k is independent on the offset in the groupdelay, which can lead to divergence. In order to avoid interference between the timing recovery and the equalizer's adaptation loop, the impulse response of the adaptive equalizer may not contain a linear phase term in frequency ν , which is called an orthogonal functionality condition. In fact the PLL should be solely responsible for the correction of linear phase term distortions and the adaptive equalizer for all higher order phase distortions e.g., in optical storage systems, like ν^2 for a defocus term, ν^3 for a tilt or coma term, ν^4 for a residual spherical aberration term due to low-frequency variations in the cover layer thickness for instance.

The novel LMS-based asynchronous equalizer with orthogonal control functionality extension adapts the equalizer in accordance with the equalizer's control

algorithm, e.g. of the LMS type, provided that the condition defined above is held in every adaptation step. A receiver in accordance with a first embodiment of the invention is illustrated in figure 4. In the topology of Fig.4, we assume that T_s is almost equal to T . Same functional entities as in Fig.2 and 3 are indicated by same letter references. The new receiver comprises orthogonal control functionality means to derive a condition the equalizer should obey in order to decrease interference between both loops. The equalizer shall adapt so that the condition is always true.

The derivation orthogonal functionality condition is explained below. Let's denote the transfer function of the FIR filter w_k by $W(v)$:

$$W(v) = \sum_k w_k \exp\{2\pi i v k\} \quad (-0.5 \leq v \leq 0.5)$$

$$= A(v) \exp\{i\varphi(v)\}$$

The phase $\varphi(v)$ may not contain terms linear in v , the groupdelay offset must be constrained:

$$\left. \frac{d\varphi(v)}{dv} \right|_{v=0} = 0$$

Further, we know that, since the equalizer coefficients w_k are real, we have for

15 $A(v)$:

$$A(-v) = A(v)$$

And thus also that

$$\left. \frac{dA(v)}{dv} \right|_{v=0} = 0$$

20 Since

$$\frac{dW(v)}{dv} = \frac{dA(v)}{dv} \exp\{i\varphi(v)\} + i \frac{d\varphi(v)}{dv} W(v)$$

Combining the equations results in:

$$\left. \frac{dW(v)}{dv} \right|_{v=0} = 0$$

25 Which is equivalent to:

$$\sum_k k w_k = 0$$

A filter that leaves linear phase terms untouched should have taps w_k obeying this constraint. To prevent the interference between the equalizer adaptation loop and the timing recovery, the objective of the filter adaptation algorithm must be altered to minimize the mean square error power J , where $E[x]$ indicates the expectation value of the statistical variable x :

$$J(k) = E[e_k^2] \quad (\text{Basic Least Mean Square (LMS) algorithm})$$

subject to the additional condition :

$$\sum_k k w_k = 0$$

This results in a new cost-function (the criterion, which is to be minimized by the adaptation is called the cost-function), where $\tilde{J}(k)$ means:

$$5 \quad \tilde{J}(k) = J(k) + \lambda \cdot \left(\sum_k k w_k \right)$$

where λ is a Lagrange multiplier. This multiplier must be chosen such that $\tilde{J}(k)$ is minimized as a function of the filter taps w_p :

$$\tilde{\nabla}_p(k) = \frac{\partial \tilde{J}(k)}{\partial w_p} = 0 \quad \forall p$$

or

$$10 \quad \tilde{\nabla}_p(k) = \lambda \cdot p + 2 \cdot E \left[\left(\sum_j x_{k-j} w_j - \sum_j g_{k-j} \hat{a}_j \right) \cdot x_{k-p} \right] = 0 \quad \forall p$$

To determine λ , the energy in $\sum_p \tilde{\nabla}_p(k)^2$ must be minimized:

$$\frac{\partial}{\partial \lambda} \left(\sum_p \tilde{\nabla}_p(k)^2 \right) = \sum_p p \cdot \tilde{\nabla}_p(k) = 0$$

Resulting in:

$$\lambda = \frac{-2 \cdot E \left[\left(\sum_j x_{k-j} w_j - \sum_j g_{k-j} \hat{a}_j \right) \cdot \sum_n x_{k-n} \right]}{\sum_n n^2} = \frac{-2 \cdot E \left[e_k \cdot \sum_n x_{k-n} \right]}{\sum_n n^2}$$

15 where \hat{a}_k stands for the decisions on a_k .

The equalizer adaptation loop must now solve the equation :

$$\underline{\tilde{\nabla}}(k) = \frac{\partial \tilde{J}(k)}{\partial \underline{w}(k)} = \left(\frac{\partial \tilde{J}(k)}{\partial w_x(k)}, \dots, \frac{\partial \tilde{J}(k)}{\partial w_k(k)} \right) \rightarrow 0$$

Iteratively, by using the steepest-descent method:

$$20 \quad w_p(k+1) = w_p(k) - \mu \tilde{\nabla}_p(k)$$

Now is

$$\begin{aligned} \tilde{\nabla}_p(k) &= \frac{\partial \tilde{J}(k)}{\partial w_p(k)} = E \left[2 \cdot e_k \cdot \frac{\partial e_k}{\partial w_p(k)} \right] + \frac{-2 \cdot p \cdot E \left[e_k \cdot \sum_n x_{k-n} \right]}{\sum_n n^2} \\ &= 2 \cdot E \left[e_k \cdot x_{k-p} \right] + \frac{-2 \cdot p \cdot E \left[e_k \cdot \sum_n x_{k-n} \right]}{\sum_n n^2} \end{aligned}$$

From the practical point of view the steepest descent update mentioned above is not computable: the expectation instruction requires an average computation over a very long period. Therefore the gradient is replaced by an instantaneous gradient, which gives:

$$5 \quad w_p(k+1) = w_p(k) - 2 \cdot \mu \cdot e_k \cdot x_{k-p} + 2 \cdot \mu \cdot p \cdot e_k \cdot \frac{\sum_n x_{k-n}}{\sum_n n^2}$$

This altered LMS algorithm will minimize the average mean square error power. Instead of the power, one may seek to minimize the average absolute value of the error:

$$\begin{aligned} \tilde{\nabla}_p(k) &= \frac{\partial \tilde{J}_1(k)}{\partial w_p(k)} = E \left[2 \cdot \text{sign}(e_k) \cdot \frac{\partial e_k}{\partial w_p(k)} \right] + \frac{-2 \cdot p \cdot E \left[\text{sign}(e_k) \cdot \sum_n n x_{k-n} \right]}{\sum_n n^2} \\ &= 2 \cdot E \left[\text{sign}(e_k) \cdot x_{k-p} \right] + \frac{-2 \cdot p \cdot E \left[\text{sign}(e_k) \cdot \sum_n n x_{k-n} \right]}{\sum_n n^2} \end{aligned}$$

10 leading to a new sign-algorithm:

$$w_p(k+1) = w_p(k) - 2 \cdot \mu \cdot \text{sign}(e_k) \cdot x_{k-p} + 2 \cdot \mu \cdot p \cdot \text{sign}(e_k) \cdot \frac{\sum_n x_{k-n}}{\sum_n n^2}$$

The multiplication by $\text{sign}(e_k)$ involves only sign reversals and is thereby significantly simpler. As a sanity check, the condition for the orthogonal control functionality of the timing recovery and the equalizer adaptation loop shall be evaluated:

15

$$\sum_k k w_k = 0$$

for the algorithm:

$$w_p(k+1) = w_p(k) - 2 \cdot \mu \cdot e_k \cdot x_{k-p} + 2 \cdot \mu \cdot p \cdot e_k \cdot \frac{\sum_n x_{k-n}}{\sum_n n^2}$$

The increment does obey the condition:

$$20 \quad \sum_p p \cdot \left(-2 \cdot \mu \cdot e_k \cdot x_{k-p} + 2 \cdot \mu \cdot p \cdot e_k \cdot \frac{\sum_n x_{k-n}}{\sum_n n^2} \right) = 2 \cdot \mu \cdot e_k \cdot \left(\sum_p p x_{k-p} - \sum_p p^2 \cdot \frac{\sum_n x_{k-n}}{\sum_n n^2} \right) = 0$$

The same check can be done for the sign-algorithm, leading to a similar result.

Figure 5 illustrates simulation results showing the evolution of the equalizer coefficients versus time. Fig. 5a shows results obtained with the topology of Fig. 3 and Fig. 5b with the topology of Fig. 4, including the orthogonal control functionality. A

comparison between both Figures shows the importance of the orthogonal control functionality, which is implemented in Fig. 4. In these simulations a 5 taps adaptive equalizer, has been used and the T_s domain is 2% deviated with respect to the data rate domain. Fig. 5a and 5b illustrate the evolution of the 5 filter taps. In Fig. 5a the compensation for orthogonal functionality is absent, causing the taps to diverge. On the other hand in Fig. 5b the topology of Fig. 4 was employed, causing the equalizer taps to converge.

Now another issue is addressed in the topology of Fig.6 relating to a second embodiment of the invention, which applies even when T_s is completely different from T . The filter updates are produced in the data rate domain and are meant for a T -spaced equalizer. However this filter is T_s spaced. This topology is thus primarily useful for near-synchronous applications, where T_s differs not too much from T .

Conceptually the calculated T -spaced filter updates need to be converted to the T_s -domain necessitating an interpolation. Fig.3 and its related description give details on the spatial interpolator, denoted SI. This interpolator performs a linear interpolation, which is very attractive from a computational point of view.

The re-sampling positions $t_i = iT_s$ can be written as $t_i = (m_i + c_i)T$, where $0 \leq c_i < 1$ and

$$m_i = \text{floor}\left(i \frac{T_s}{T}\right) \quad c_i = i \frac{T_s}{T} - m_i$$

As c_i varies between 0 and 1, t_i varies between $m_i T$ and $(m_i + 1)T$, and w varies between $w(m_i T)$ and $w((m_i + 1)T)$.

According to the linear interpolation as shown in Fig. 6, we get:

$$w(IT_s) = (1 - c_i) \cdot w(m_i T) + c_i \cdot w((m_i + 1)T)$$

Starting from the basic LMS algorithm:

$$w_{m_i}(k+1) = w_{m_i}(k) - 2 \cdot \mu \cdot \text{sign}(e_k) \cdot x_{k-m_i}$$

Applying the spatial interpolator :

$$\tilde{w}_i(k+1) = (1 - c_i) \cdot w_{m_i}(k+1) + c_i \cdot w_{m_i+1}(k+1)$$

Leads to :

$$\tilde{w}_i(k+1) = (1 - c_i) \cdot (w_{m_i}(k) - 2 \cdot \mu \cdot \text{sign}(e_k) \cdot x_{k-m_i}) + c_i \cdot (w_{m_i+1}(k) - 2 \cdot \mu \cdot \text{sign}(e_k) \cdot x_{k-m_i-1})$$

$$= \tilde{w}_i(k) - 2 \cdot \mu \cdot \text{sign}(e_k) \cdot [(1 - c_i) \cdot x_{k-m_i} + c_i \cdot x_{k-m_i-1}] = \tilde{w}_i(k) - 2 \cdot \mu \cdot \text{sign}(e_k) \cdot \tilde{x}_{k,i}$$

Time-shifts in the impulse response of this new FIR are fully compensated by the timing recovery. As a result the error e_k is independent on the offset in the groupdelay, which can lead to divergence. In order to have orthogonal control

functionality of the timing recovery and the equalizer's adaptation loop, one has to include the results derived in the previous description in relation to Fig. 4.

This results in the topology of Fig. 7.

$$\tilde{w}_i(k+1) = \tilde{w}_i(k) - 2 \cdot \mu \cdot \text{sign}(e_k) \cdot [(1 - c_i) \cdot x_{k-m_i} + c_i \cdot x_{k-m_i-1}] + 2 \cdot \mu \cdot \text{sign}(e_k) \cdot i \cdot \frac{\sum_n [(1 - c_n) \cdot x_{k-m_n} + c_n \cdot x_{k-m_n-1}]}{\sum_n n^2}$$

5

If the spatial Interpolator would be applied on the 'upgraded' version of LMS algorithm, which has the extra term for orthogonal functionality, the equalizer's adaptation loop would still have stability problems. The asynchronous FIR filter would not obey the condition:

10

$$\sum_k k \tilde{w}_k = 0.$$

This would be due to the fact that the spatial interpolator doesn't preserve this property when there are at least 5 equalizer taps. One can intuit this easily, For instance, for a 5-taps filter one has:

$$\tilde{w}_{-2} = \frac{w_{-2} + w_{-1}}{2}$$

$$\tilde{w}_{-1} = \frac{w_0}{4} + \frac{3 \cdot w_{-1}}{4}$$

$$\tilde{w}_0 = w_0$$

$$\text{and } \sum_k k w_k = 0$$

$$\tilde{w}_1 = \frac{w_0}{4} + \frac{3 \cdot w_1}{4}$$

$$\tilde{w}_2 = \frac{w_2 + w_1}{2}$$

$$\sum_k k \tilde{w}_k = -w_{-2} - \frac{5 \cdot w_{-1}}{4} + \frac{5 \cdot w_1}{4} + w_2 \neq 0$$

15

In order to have an idea on the necessity of the spatial interpolator, DVR simulations are done with ideal signals. In the DVR optical receiver the relation T/Ts amounts to 4/3, leading to an adaptive equalizer with 3/4 T spacing.

20

Figure 8 illustrates simulation results showing the evolution of the FIR coefficients versus time. Fig. 8a shows results obtained with the topology of Fig. 7. In Fig. 8b the spatial interpolator is absent. In Fig. 8b the spatial interpolator is absent: the T spaced tap updates are connected to the 3/4 T spaced equalizer without any conversion. This causes the taps to diverge. On the other hand in figure 8a the topology of Fig. 7 was employed, which causes the equalizer to converge.

25

Fig.9 shows an example of a system in accordance with the invention comprising a receiver as shown in Fig.2, 3, 4 and 7. The system can be, for example, a

digital recording system. It comprises a recorder 41 for recording a digital sequence 93 on a recording support 92 and a receiver 94 for reading the recorded sequence 95 from said recording support. The recording support 92 may be, for example, an optical disk.

5

It has just been described an interference free least mean square based asynchronous equalization topology to prevent interference between the timing recovery loop and the equalizer's adaptation loop. Because time-shifts in the impulse response of the FIR filter, which occur as offsets in the groupdelay, are fully compensated by the timing recovery, the error e_k , which drives the filter's adaptation loop, would be independent on the offset in the groupdelay, which can lead to divergence.

10

It has been described how the interference between the adaptation loops in an asynchronous LMS based equalizer can be avoided. First a condition is derived which provides the asynchronous adaptive equalizer with orthogonal control functionality. Subsequently this constraint is built in the least mean square criterion employing a multiplier of Lagrange. This leads to a topology that has cancelled out the interference between the adaptation loops. Finally this new structure is extended with a spatial interpolator in order to have more flexibility regarding the T/Ts ratio.

15

Despite the invention was described, by means of an example, with respect to a particular LMS-based asynchronous receiver topology, illustrated in Fig. 4 and Fig. 7, this does not limit the scope of the invention. The basic principle of the invention, called the "orthogonal control functionality", is also applicable to any LMS-based asynchronous receiver topology having a timing recovery loop and an adaptive equalizer's adaptation loop. The basic principle of the invention is the solution for avoiding interference between the timing recovery loop and the equalizer's adaptation loop, where the equalizer is placed in the asynchronous domain. This solution, described with respect to Fig.4 and Fig.7, is in this case calculated for the LMS based control but can in fact also be calculated for a zero forcing control. The solution consists of altering the adaptation algorithm such that the condition for interference free working of the system is obeyed.

20

25

30

The drawings and their description herein before illustrate rather than limit the invention. It will be evident that there are numerous alternatives, which fall within the scope of the appended claims. In this respect, the following closing remarks are made.

35

There are numerous ways of implementing functions by means of items of hardware or software, or both. In this respect, the drawings are very diagrammatic, each representing only one possible embodiment of the invention. Thus, although a drawing shows different functions as different blocks, this by no means excludes either
5 that a single item of hardware or software carries out several functions, or that a function can be carried out by an assembly of items of hardware or software, or both.

Claims.

1. A receiver for delivering a data sequence (a_k) at a data rate $1/T$ from a received sequence (r_n) sampled at a clock rate $1/T_s$, asynchronous to the data rate $1/T$, the receiver comprising:
 - an adaptive equalizer (EQ) for delivering an equalized sequence (y_n) from said received sequence (r_n), said equalizer operating at the clock rate $1/T_s$ and being controlled via an equalizer's adaptation loop,
 - a sampling rate converter (SRC1) for converting said equalized sequence (y_n) to an equivalent input sequence (x_k) to be provided to an error generator (21) at the data rate $1/T$ via a timing recovery loop,
 - an error generator (21) for delivering, from said input sequence (x_k), the data sequence (a_k) and an error sequence (e_k) to be used in both loops,
 - orthogonal control functionality means (40) for deriving a condition for the adaptive equalizer (EQ) to obey in order to decrease interference between said equalizer's adaptation loop and said timing recovery loop.
2. A receiver as claimed in claim 1, wherein the control loop further comprises spatial conversion means (SI) for converting a given initially T -spaced sequence generated within the control loop into an equivalent T_s -spaced sequence for controlling said equalizer coefficient vector (\underline{W}_n).
3. A receiver as claimed in claim 4, wherein said spatial conversion means (SI) are arranged to perform a linear interpolation.
4. A receiver as claimed in claim 4, wherein said spatial conversion means (SI) are arranged to perform a nearest-neighbor interpolation.
5. A digital system comprising a transmitter for transmitting a digital sequence via a channel support and a receiver for extracting said digital sequence from said channel support, wherein said receiver is a receiver as claimed in any of claims 1 to 4.
6. In a receiver comprising an adaptive equalizer, an equalizer adaptation method of receiving a sequence (r_n), sampled at a clock rate $1/T_s$, and of delivering a data sequence (a_k) at a data rate $1/T$, the method comprising the following steps :

- an adaptive equalizing step of delivering an equalized sequence (y_n) from the received sequence (r_n) using an equalizer coefficient vector (\underline{W}_n) in a control loop,
- a first sampling rate converting step (SRC1) of converting said equalized sequence (y_n) to an equivalent input sequence (x_k) to be processed through an error generating step (21) at the data rate $1/T$ within a timing recovery loop,
- an error generating step (21) of generating, from said input sequence (x_k), the data sequence (a_k) and an error sequence (e_k) at the data rate $1/T$ to be used in both loops,
- a step of generating a control vector sequence (\underline{S}_n) from the error sequence (e_k) and the received sequence (r_n), for controlling said equalizer coefficient vector (\underline{W}_n),
- an orthogonal control step (40) for deriving a condition for the adaptive equalizer to obey in order to decrease interference between said control loop and the timing recovery loop.

7. A computer program product for a receiver computing a set of instructions which when loaded into the receiver causes the receiver to carry out the method as claimed in claim 6.

8. A signal for carrying a computer program, the computer program being arranged to carry out the method as claimed in claim 6.

Abstract.

The Invention relates to an interference free LMS-based asynchronous receiver for digital transmission and recording systems. The receiver, having an asynchronously placed LMS-based adaptive equalizer, has 2 control loops: a timing recovery loop (by means of, for instance a PLL (Phase locked loop) and an equalizer's adaptation loop.

- 5 Interference between both loops is avoided by deriving a condition the equalizer should obey to avoid the interference between the two loops, which implies "orthogonal control functionality" and by combining the condition with the equalizer's adaptation loop. The equalizer shall adapt so that the condition is always true.

10 Fig. 4

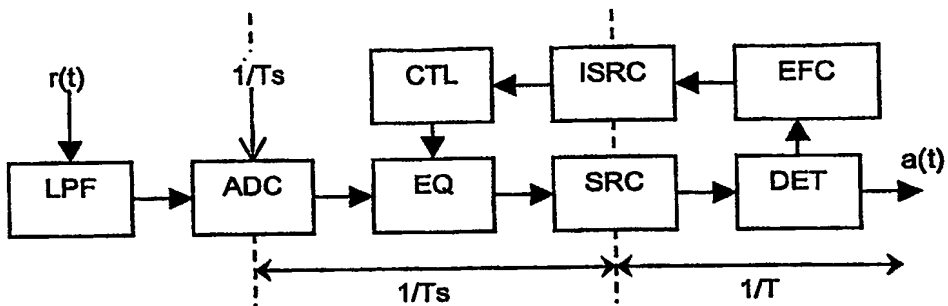


FIG. 1

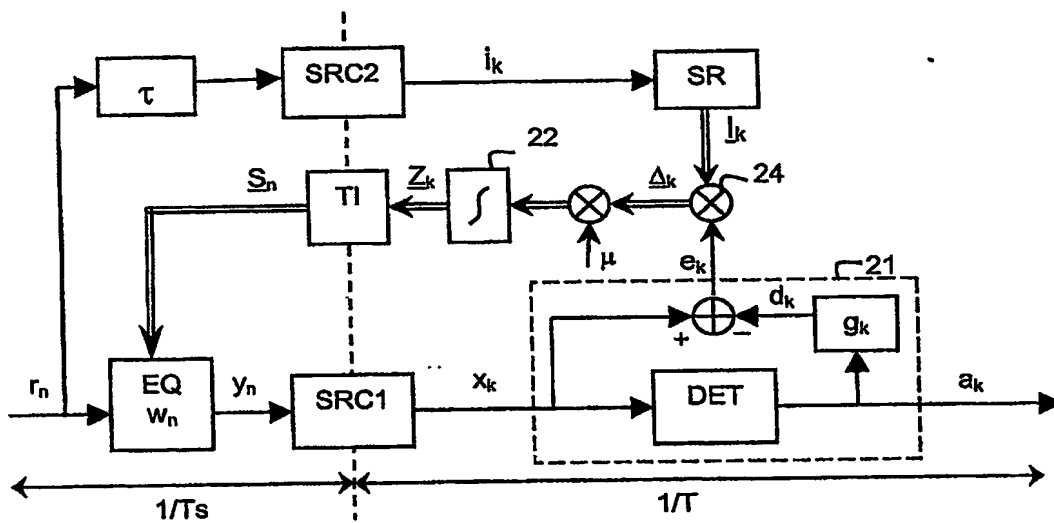


FIG. 2

The diagram illustrates a digital control system for a motor drive, divided into two main sections by a dashed vertical line: a reference path (left) and a feedback path (right).

Reference Path (Left):

- The reference signal r_n is input to a block labeled τ .
- The output of τ is fed into a block labeled **SRC2**.
- The output of **SRC2** is i_k , which is fed into a block labeled **SR**.

Feedback Path (Right):

- The output of **SR** is x_k , which is fed into a block labeled **FIR** (part of block 40).
- The output of **FIR** is Δ_k , which is fed into a block labeled **TI** (part of block 22).
- The output of **TI** is z_k , which is fed into a block labeled **SRC1**.
- The output of **SRC1** is z_k , which is fed into a block labeled **DET** (part of block 21).
- The output of **DET** is a_k , which is fed into a block labeled g_k .
- The output of g_k is d_k , which is fed into a block labeled e_k .
- The output of e_k is Δ_k , which is fed into a block labeled μ .
- The output of μ is Δ_k , which is fed into a block labeled Δ_k .
- The output of Δ_k is Δ_k , which is fed into a block labeled Δ_k .

Other Blocks and Signals:

- A block labeled **EQ** (part of block 21) receives r_n and y_n as inputs and outputs y_n .
- A block labeled **TI** (part of block 22) receives Δ_k as input and outputs z_k .
- A block labeled **SRC1** (part of block 21) receives z_k as input and outputs z_k .
- A block labeled **SRC2** (part of block 21) receives r_n as input and outputs i_k .
- A block labeled **SR** (part of block 21) receives i_k as input and outputs x_k .
- A block labeled **FIR** (part of block 40) receives x_k as input and outputs Δ_k .
- A block labeled **DET** (part of block 21) receives z_k as input and outputs a_k .
- A block labeled g_k (part of block 21) receives a_k as input and outputs d_k .
- A block labeled e_k (part of block 21) receives d_k as input and outputs Δ_k .
- A block labeled μ (part of block 21) receives Δ_k as input and outputs Δ_k .
- A block labeled Δ_k (part of block 21) receives Δ_k as input and outputs Δ_k .

Timing and Sampling:

- The reference path is sampled at $1/T_s$.
- The feedback path is sampled at $1/T$.

FIG. 4

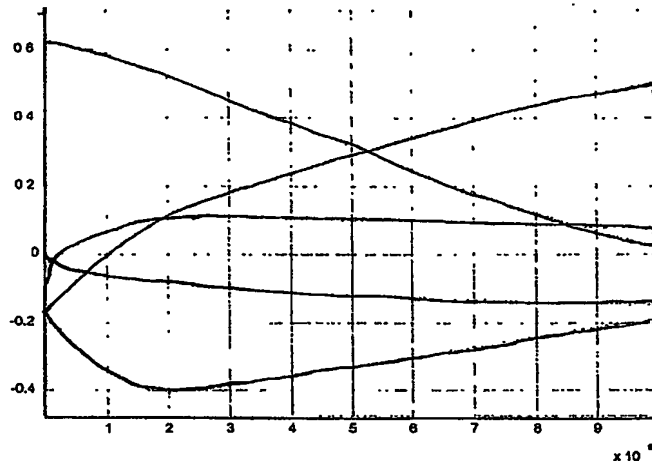


FIG. 5a

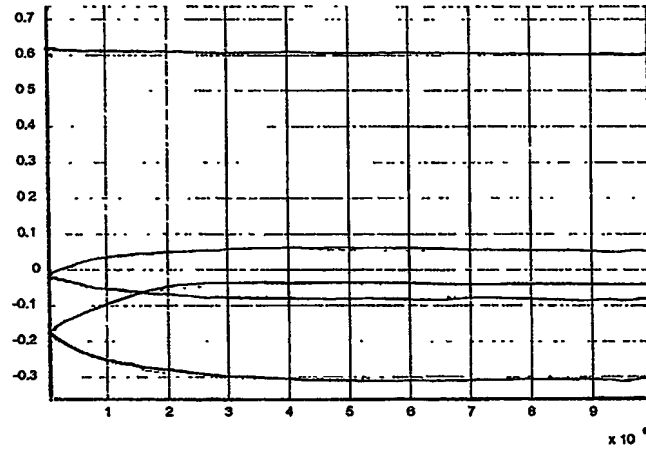


FIG. 5b

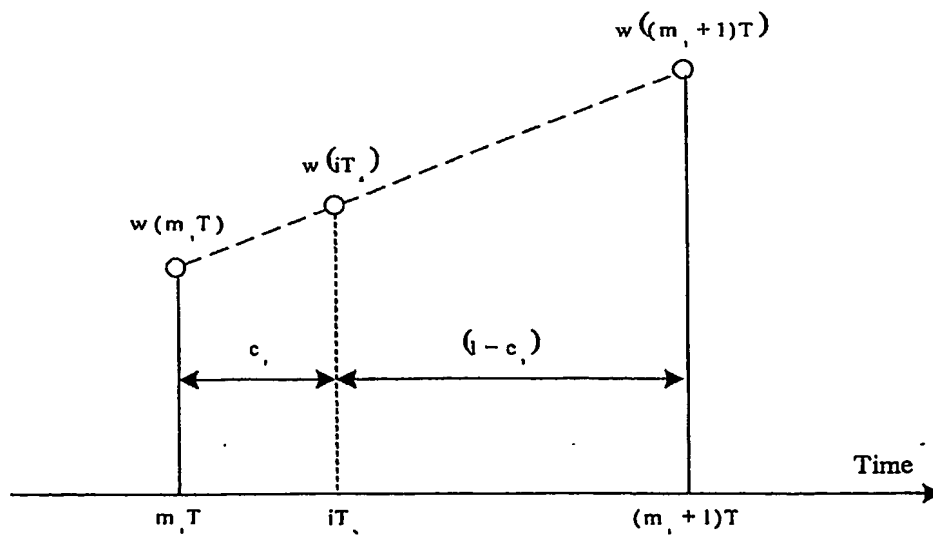


FIG. 6

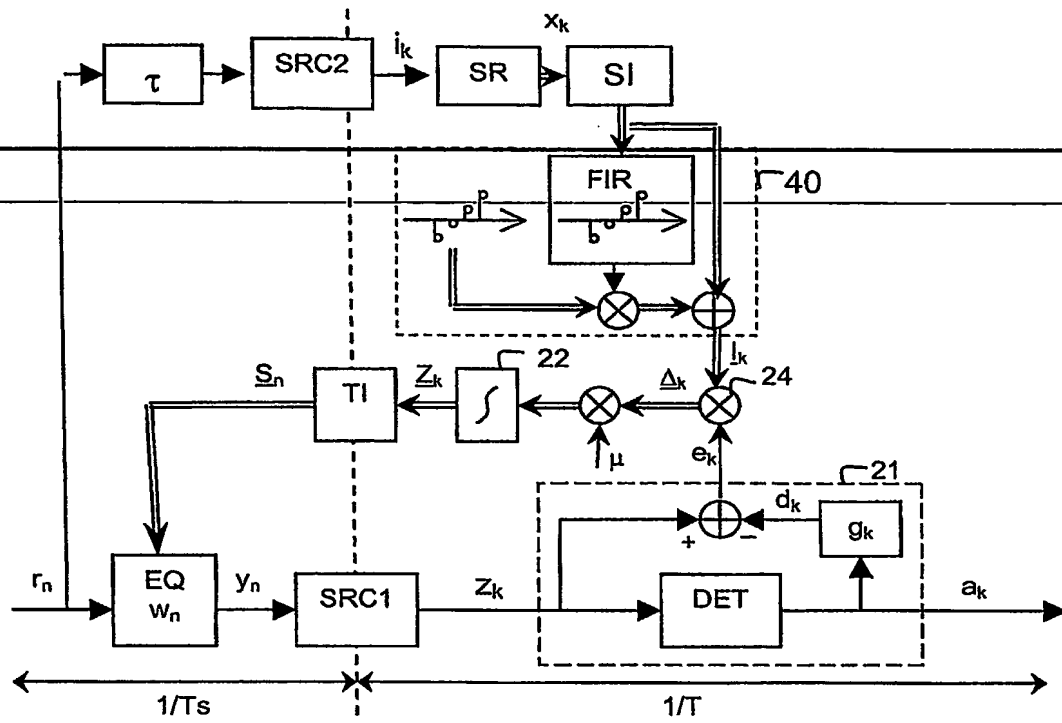


FIG. 7

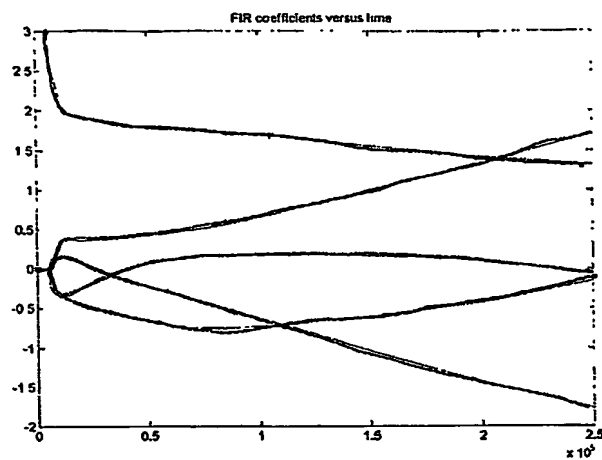


FIG. 8a

0

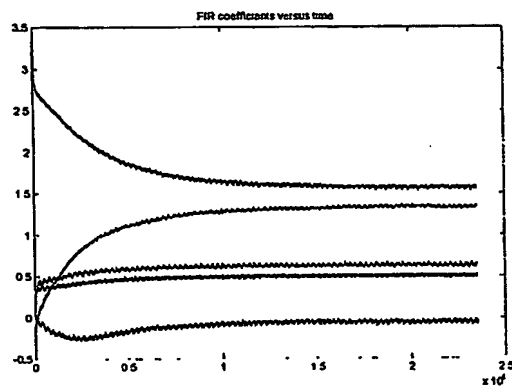


FIG. 8b

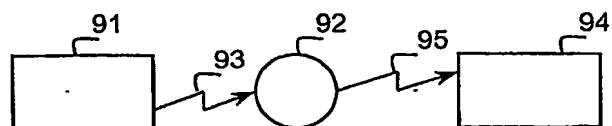


FIG. 9

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.